


# 3900 3" System 14 Progressive Flow

Flecks "System 14" has been the industry standard progressive flow design for decades. Offering exceptional efficiency and flow rates from 9-1680 GPM. The Fleck "System 14" is the choice for applications where efficiency and quality are paramount. Order 2-8 tanks!

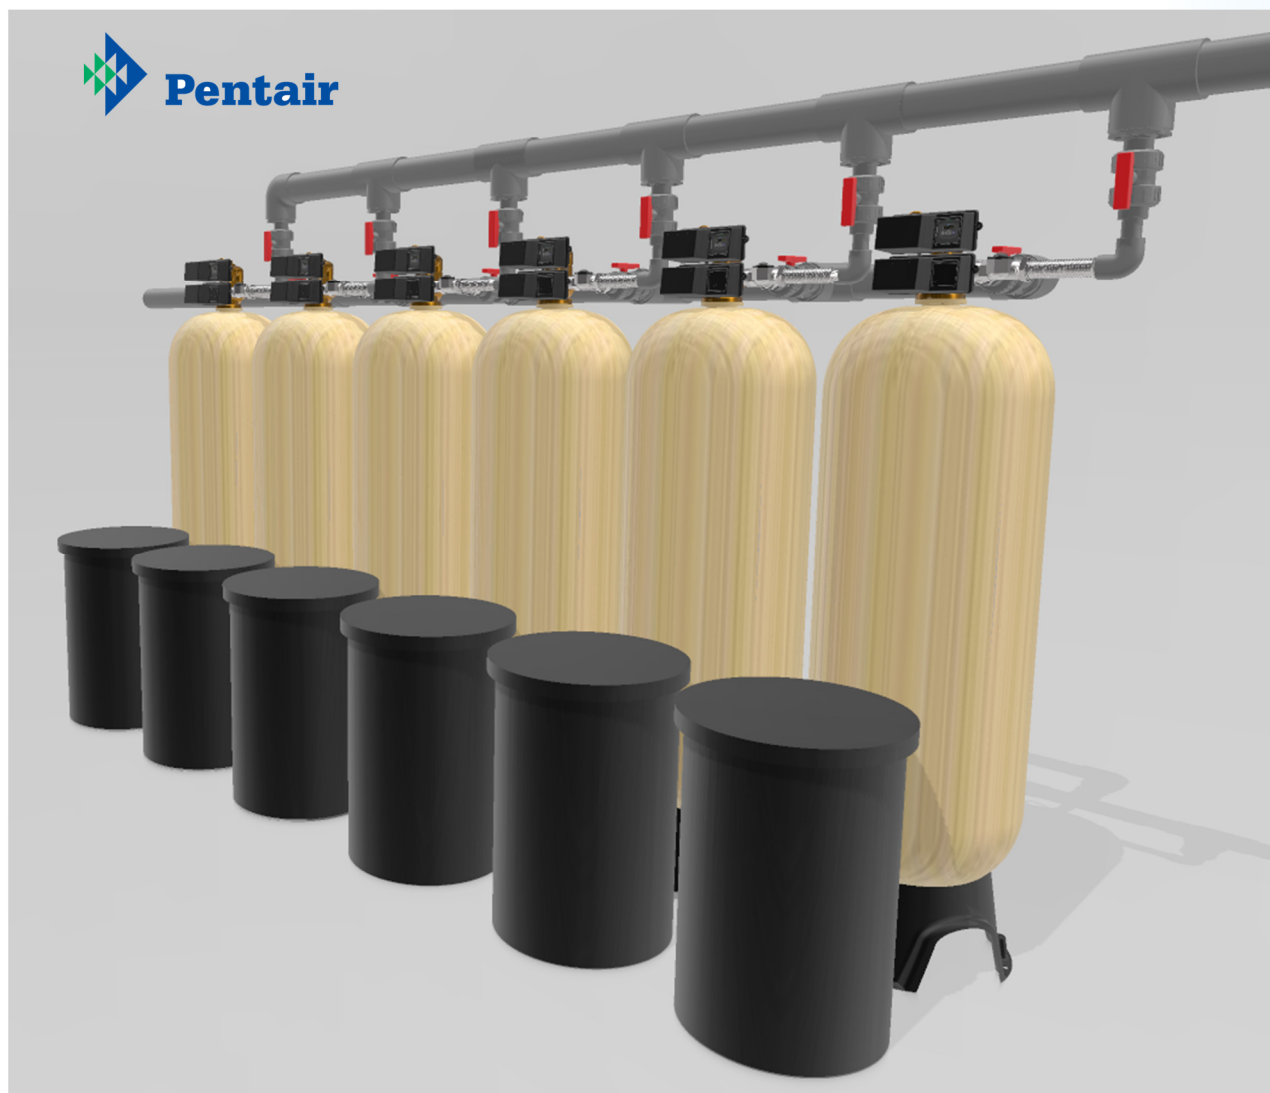

System 14 Progressive Metered Softener	Tanks 2-8	≈Service/ Peak GPM 2 Tanks	≈Service/ Peak GPM 3 Tanks	≈Service/ Peak GPM 4 Tanks	≈Service/ Peak GPM 5 Tanks	≈Service/Peak GPM 6 Tanks	≈Service/Peak GPM 7 Tanks	≈Service/Peak GPM 8 Tanks	Rec. Brine Tanks	Total Ft³ per tank	≈Height
WS-291P-2472-6A96	24"x72"	9-	9-	9-	9-	9-	9-	9-	24"x60"	9	93"
WS-291P-3072-6A96	30"x72"	15-98/147	15-196/294	15-294/441	15-392/588	15-490/735	15-588/882	15-732/1029	30"x60"	14	102"
WS-291P-3657-6A96	36"x57"	21-141/210	21-282/420	21-423/630	21-564/840	21-705/1050	21-564/1260	21-705/1470	30"x60"	12	87"
WS-291P-3672-6A96	36"x72"	21-141/200	21-282/400	21-423/600	21-564/800	21-705/1000	21-564/1200	21-705/1400	39"x48"	18	102"
WS-291P-4272-7A96	42"x72"	29-192/220	29-384/440	29-576/660	29-768/880	29-960/1100	29-1152/1320	21-1344/1540	42"x60"	25	92"
WS-291P-4872-7A96	48"x72"	38-220/230	38-440/460	38-660/690	38-880/920	38-1100/1150	39-1320/1380	39-1540/1610	50"x60"	30	102"
WS-291P-6386-6796	63"x86"	65-240/240	65-480/480	65-720/720	65-960/960	65-1200/1200	65-1440/1440	65-1680/1680	Call	50	118"

Be sure to include flexible connectors with commercial units!

51-9315

