




# Pentair R0mate RO Pressure Tanks

Pentair® R0mate RO Storage Tanks are high-performance, high-value vessels for residential and light commercial reverse osmosis applications. Specifically designed for reverse osmosis systems, these small vessels offer big advantages over competitive tanks via 100% seamless, composite construction, and the ability to discharge in any position.

## Features and Benefits

- ◆ Pre-installed inlet-outlet assembly
- ◆ Concave dome allows for maximum amount of service water
- ◆ High density polyethylene inner liner
- ◆ Fiberglass-wound and epoxy resin sealed outer shell
- ◆ Durable PVC plumbing connections
- ◆ Environmentally safe and 100% lead free
- ◆ 15-40 gallon systems include 1" MPT connector
- ◆ 60-120 gallon systems include 1-1/4" MPT connector
- ◆ Maximum operating pressure is 125 PSI.
- ◆ 100% seamless composite construction
- ◆ Factory-backed 5 year warranty
- ◆ 1/2" & 3/8" Joh Guest® connector kit available

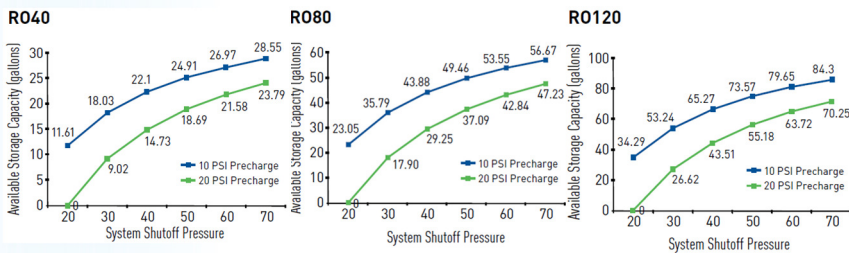

Item #	Capacity	Dimensions/Connection	Capacity @ 10PSI Precharge, 60 PSI Shutoff
61-TKR-015	14.5 gal	16"x26"/1" MPT	≈9.7 gallons
61-TKR-020	19.8 gal	16"x32"/1" MPT	≈13.25 gallons
61-TKR-030	29.5 gal	16"x34"/1" MPT	≈19.75 gallons
61-TKR-040	40.3 gal	16"x57"/1" MPT	≈26.97 gallons
61-TKR-060	60 gal	24"x41.5"/1-1/4" MPT	≈40.16 gallons
61-TKR-080	86.7 gal	24"x55.25"/1-1/4" MPT	≈53.55 gallons
61-TKR-120	119.7 gal	24"x74.25"/1-1/4" MPT	≈79.65 gallons



Tested and Certified by the Water Quality Association (WQA) to NSF/ANSI Standard 61 section 8 and NSF/ANSI 372 for lead free compliance



1"x1/2" & 3/8"  
61-TKV168F

1-1/4"x1/2" & 3/8"  
61-TKV208F

